



Main

Range of product	Modicon Quantum automation platform
Product or component type	AC discrete output modules
Discrete output number	16

Complementary

Discrete output type	Isolated
Group of channels	16 groups of 1 channel
Supply frequency	47...63 Hz
Voltage drop	1.5 V
Discrete output voltage	20...253 V AC
Addressing requirement	1 output word
Absolute maximum output	300 Vrms for 10 s AC 400 Vrms 1 cycle AC
Maximum load current	4 A rms sum of four points, continuous 1 mA rms 24 Vrms off state leakage per output 1 mA rms 48 Vrms off state leakage per output 16 A rms per module 2 mA rms 115 Vrms off state leakage per output 2.5 mA rms 230 Vrms off state leakage per output 3 A rms 200...230 V per output 4 A rms 24...115 V per output
Surge current	<= 10 A during 3 cycles per point <= 20 A during 2 cycles per point <= 30 A during 1 cycle per point
DV/Dt	400 V/ms
Response time	<= 0.5 ms at state 0 to state 1 <= 0.5 ms at state 1 to state 0
Protection type	Internal by RC filter
Power dissipation	1.85 + (1.1 V x total module load current)
Associated fuse rating	5 A
Marking	CE

Local signalling	1 LED green bus communication is present (Active) 1 LED red external fault detected (F) 16 LEDs green input status
Bus current requirement	350 mA
Module format	Standard
Product weight	0.485 kg

Environment

Product certifications	CUL FM Class 1 Division 2
Standards	CSA C22.2 No 142 UL 508
Electromagnetic compatibility	Electrostatic discharge immunity test (test level:4 kV, contact discharge) conforming to IEC 801-2 Electrostatic discharge immunity test (test level:8 kV, air discharge) conforming to IEC 801-2 Susceptibility to electromagnetic fields (test level:10 V/m, 80...1000 MHz) conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0936 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available End of life manual
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

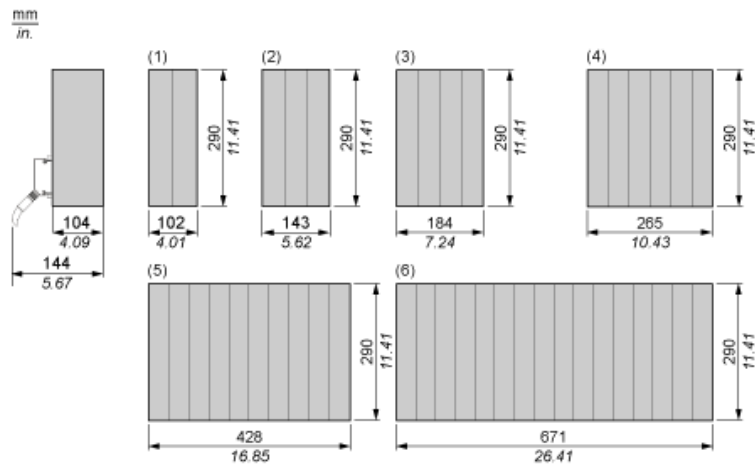

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

24...230 Vac Discrete Output Module

Wiring Diagram

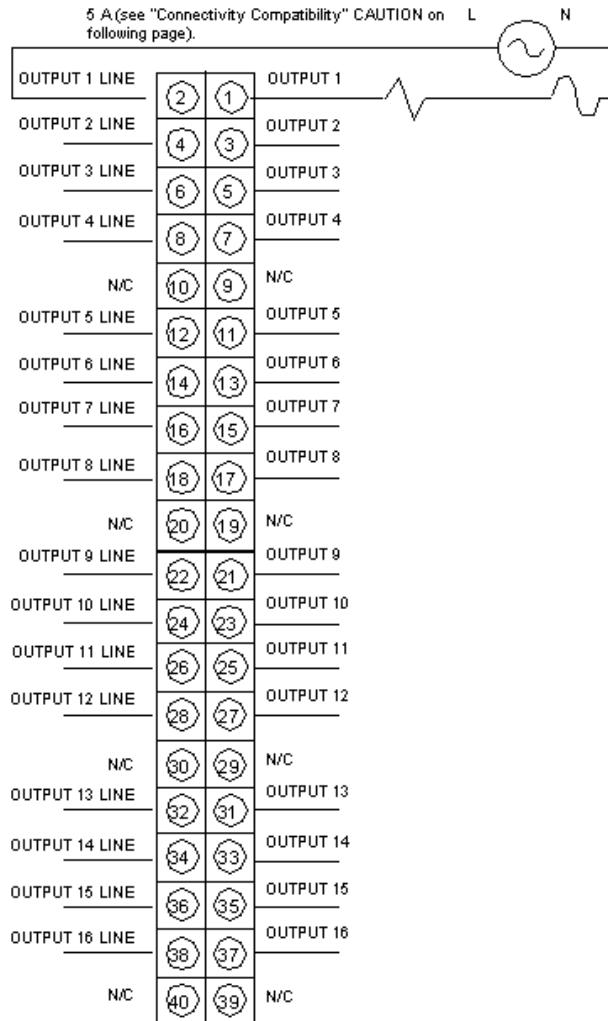

N/C Not Connected

140DAO84000 is replaced by:



Standard environment BMXDAO1605

discrete output module M340 - 16 outputs - triac - 100..240 V AC

Qty 1

Reason for Substitution: End of life | Substitution date: 31 December 2021 | Not same dimensions/design - 100~240 vs. 24~230VAC, no channel isolation