



Digital monitoring relay Current monitoring, 22.5 mm from 0.05-10 A AC/DC Overshoot and undershoot 24 to 240 V AC/DC 50 to 60 Hz DC and AC ON delay and noise pulses delay 0.1 to 20 s Hysteresis 0.01 to 5 A 1 change-over contact with or without fault buffer spring-type connection system

Figure similar

Product function		Current monitoring relay
Measuring circuit:		
Number of poles for main current circuit		1
Type of current for monitoring		AC/DC
Measurable current	A	0.05 ... 15
Measurable current at AC	mA	50 ... 15 000
Measurable line frequency	Hz	40 ... 500
Adjustable pick-up value current		
• 1	A	0.05 ... 10
• 2	A	0.05 ... 10
Adjustable response delay time		
• when starting	s	0.1 ... 20
• with lower or upper limit violation	s	0.1 ... 20
Adjustable switching hysteresis for measured current value	mA	10 ... 5 000
Buffering time in the event of power failure minimum	ms	10
Operating voltage rated value	V	24 ... 240

Response time maximum	ms	450
Relative metering precision	%	5
Accuracy of digital display		+/-1 digit
Relative temperature-related measurement deviation	%	5
Temperature drift per °C	%/°C	0.1
Relative repeat accuracy	%	1

#### General technical data:

Design of the display		LCD
Product function		
• Overcurrent detection 1 phase		Yes
• Overcurrent detection 3 phase		No
• undercurrent detection 1 phase		Yes
• undercurrent detection 3 phases		No
• Overcurrent detection DC		Yes
• undercurrent detection DC		Yes
• Current window recognition DC		Yes
• External reset		Yes
• Auto-reset		Yes
• Adjustable open/closed-circuit current principle		Yes
Starting time after the control supply voltage has been applied	ms	1 000
Type of voltage of the supply voltage		AC/DC
Supply voltage		
• 1 at AC		
— at 50 Hz	V	24 ... 240
— at 60 Hz	V	240 ... 24
• 1		
— at DC	V	24 ... 240
Surge voltage resistance rated value	kV	4
Consumed active power	W	2
Protection class IP		IP20
Electromagnetic compatibility		IEC 60947-1 / IEC 61000-6-2 / IEC 61000-6-4
Vibration resistance acc. to IEC 60068-2-6		1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
Shock resistance acc. to IEC 60068-2-27		sinusoidal half-wave 15g / 11 ms
Installation altitude at height above sea level maximum	m	2 000
Conducted interference due to burst acc. to IEC 61000-4-4		2 kV
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		2 kV
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV
Electrostatic discharge acc. to IEC 61000-4-2		6 kV contact discharge / 8 kV air discharge






Field-bound parasitic coupling acc. to IEC 61000-4-3		10 V/m
Insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	V	690
maximum permissible voltage for safe isolation		
• between control and auxiliary circuit	V	300
• between auxiliary and auxiliary circuit	V	300
Degree of pollution		3
Ambient temperature		
• during operation	°C	-25 ... +60
• during storage	°C	-40 ... +85
• during transport	°C	-40 ... +85
Galvanic isolation		
• between entrance and outlet		Yes
• between the outputs		Yes
• between the voltage supply and other circuits		Yes


Mechanical data:		
Width	mm	22.5
Height	mm	94
Depth	mm	91
Mounting position		any
Required spacing for grounded parts		
• forwards	mm	0
• Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• downwards	mm	0
Required spacing with side-by-side mounting		
• forwards	mm	0
• Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• downwards	mm	0
Required spacing for live parts		
• forwards	mm	0
• Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• downwards	mm	0
Mounting type		snap-on mounting
Type of electrical connection		
• for auxiliary and control current circuit		spring-loaded terminals

• for main current circuit		spring-loaded terminals
<b>Product function</b>		
• removable terminal for auxiliary and control circuit		Yes
• removable terminal for main circuit		Yes
<b>Type of connectable conductor cross-sections</b>		
• solid		2x (0.25 ... 1.5 mm <sup>2</sup> )
• finely stranded		
— with core end processing		2 x (0.25 ... 1.5 mm <sup>2</sup> )
— without core end processing		2x (0.25 ... 1.5 mm <sup>2</sup> )
• at AWG conductors		
— solid		2x (24 ... 16)
— stranded		2x (24 ... 16)

<b>Outputs:</b>		
Number of NO contacts delayed switching		0
Number of NC contacts delayed switching		0
Number of CO contacts delayed switching		1
<b>Ampacity</b>		
• of the output relay		
— at AC-15		
— at 250 V at 50/60 Hz	A	3
— at 400 V at 50/60 Hz	A	3
— at DC-13		
— at 24 V	A	1
— at 125 V	A	0.2
— at 250 V	A	0.1
• for permanent overcurrent maximum permissible	A	15
• for overcurrent duration < 1 s maximum permissible	A	50
Operating current at 17 V minimum	A	0.005
Continuous current of the DIAZED fuse link of the output relay	A	4
Thermal current of the switching element with contacts maximum	A	5
Mechanical service life (switching cycles) typical		10 000 000
Electrical endurance (switching cycles) at AC-15 at 230 V typical		100 000
Operating frequency with 3RT2 contactor maximum	1/h	5 000

Certificates/ approvals:

General Product Approval			EMC	Declaration of Conformity	Test Certificates
					<a href="#">Type Test Certificates/Test Report</a>
CCC	UL		C-Tick	EG-Konf.	

Test Certificates	Shipping Approval	other	Railway
<a href="#">Special Test Certificate</a>	 LRS	<a href="#">Confirmation</a>	<a href="#">Vibration and Shock</a>

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

##### Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4622-2AW30>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4622-2AW30>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UG4622-2AW30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4622-2AW30&lang=en)

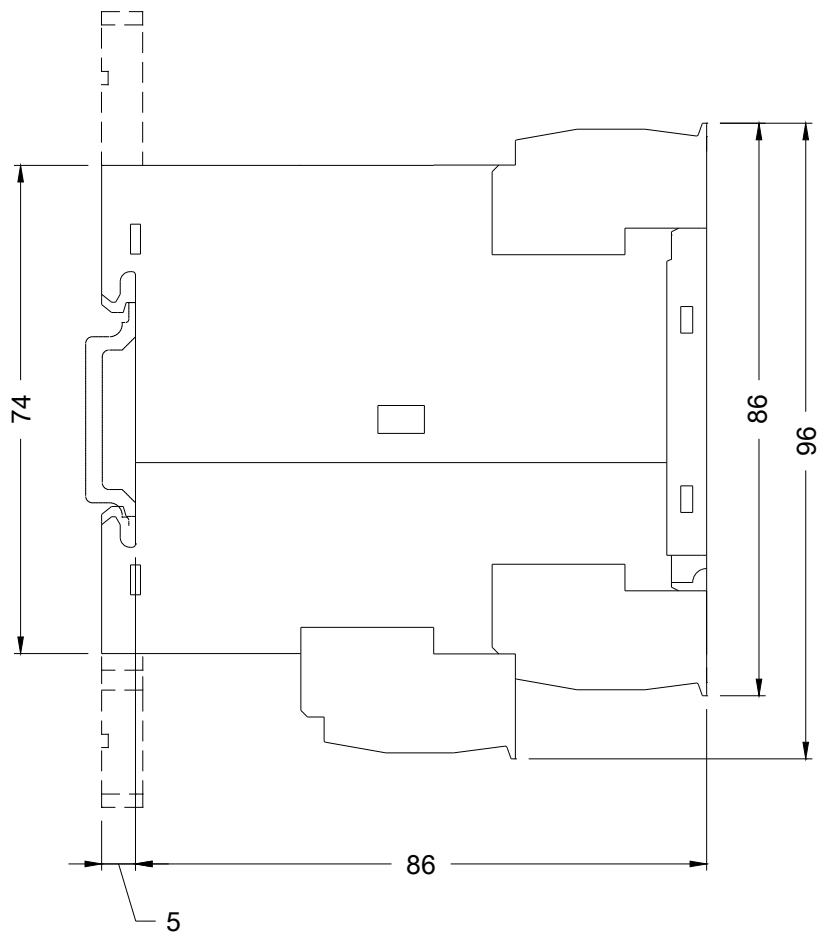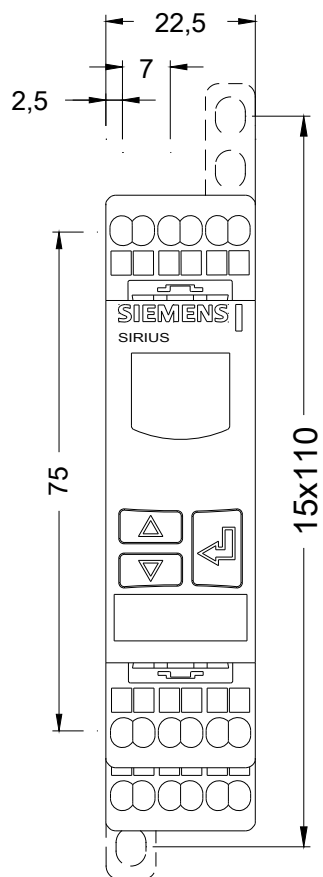

last modified:

02/27/2018